

Verso S 1300 F C5

Nominal air flow, m ³ /h	1 347
Nominal air flow, l/s	374
Panel thickness, mm	50
Unit weight, kg	46
Filters dimensions B×H×L, mm	558×287×46
Electric power input of the fan drive at reference flow rate, W	350
Maintenance space, mm	400
Control system	C5



Acoustic data


A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	74
Supply outlet	80
Casing	56


A-weighted sound pressure level L_{PA} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	46
--------------	----

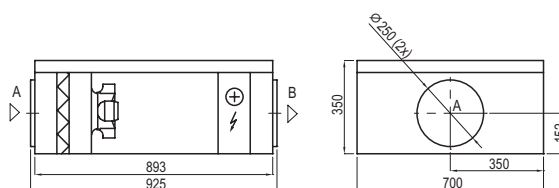

Performance

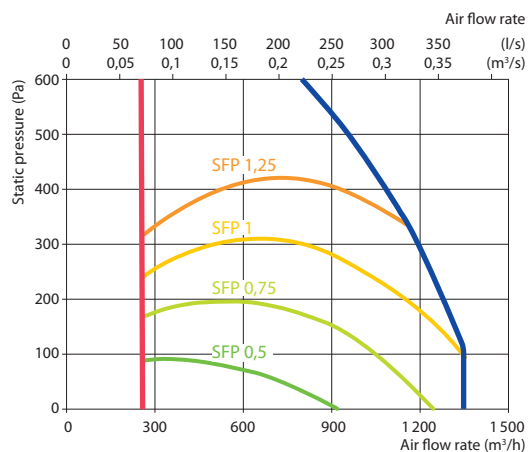

* Compliance to ErP2018 requirements check with the selection program.

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT, °C
Verso S 1300 F-HE/9	3~400	9,0	15,7	19,5
Verso S 1300 F-HE/15	3~400	15,0	24,4	32,6
Verso S 1300 F-HW	1~230	–	3	–


Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	10,1	8,4	6,5
Flow rate, dm ³ /h	448	369	286
Pressure drop, kPa	3,3	2,8	2,3
Temperature in/out, °C	-5 / 18,2	-5 / 14,2	-5,0 / 10,0
Maximal capacity, kW	10,1	8,4	6,5
Connection, "	½		

Accessories

Closing damper	AGUJ-M-250+LF24/LM24
Silencer	A AGS-250-50-900-M
	B AGS-250-50-1200-M
PPU	PPU-HW-3R-15-2.5-W2
Air heater-cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8243

Mounting positions



2 3 4 with water heater only