

# Verso R 1300 U C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	1468
Nominal air flow according to ErP 2018, l/s	408
Panel thickness, mm	50
Unit weight, kg	203
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	11,7
Maximal operating current HW, A	5,5
Filters dimensions BxHxL, mm	800x400x46
Electric power input of the fan drive at maximum flow rate, W	270
Electric air heater capacity, kW / Δt, °C	4,5 / 9
Maintenance space, mm	800
Control system	C5

### Acoustic data

#### A-weighted sound power level L<sub>wa</sub>, dB(A) at nominal flow rate

Supply inlet	66
Supply outlet	82
Exhaust inlet	67
Exhaust outlet	79
Casing	58


#### A-weighted sound pressure level L<sub>pa</sub>, dB(A)

10 m<sup>2</sup> normally isolated room, distance from casing – 3 m.  
Surroundings

Surroundings	48
--------------	----


### Performance (Verso R 1300 UH data)

Supply air filter F7, exhaust air filter M5

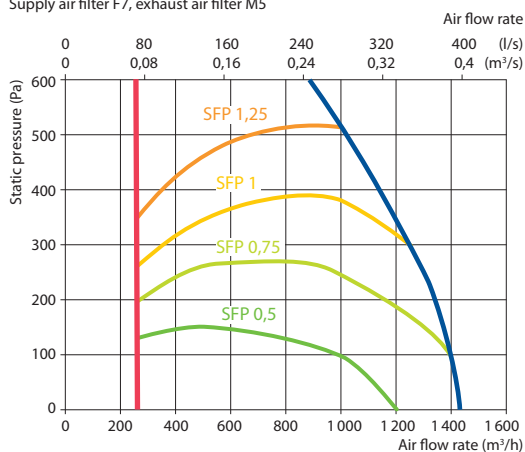

### Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	A/D AGS-315-100-900-M
	B/C AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1-W2
Water cooler	DCW-1,2-8
2-way valve	VVP45.20-4.0+SSB61
DX cooler	DCF-1,2-8
Cooling unit	MOU 36HFN8+KA8243



### Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	12,7	14,3	15,4	16,4	17,4	22,6	23,7	24,7


indoor +22°C, 20% RH

### Changeover water/ DX heating – cooling exchanger (HCW/HCDX)

	Winter		Summer	
	Water temperature in/out, °C	Condensation/evaporation T, °C	Capacity, kW	Maximal capacity, kW
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	4,2	7,9	9,6	4,3
Maximal capacity, kW	9,8	8,9	12,0	7,5
Pressure drop, kPa	1,7	9,5	–	–
Air temperature in/out, °C	12,7 / 22	30 / 18	12,7 / 22	30 / 18
Connection, " / mm	¾		½ / 22	

Summer: +30°C/ 50%; HCW – 1350 m<sup>3</sup>/h

#### Shown as right (R1)

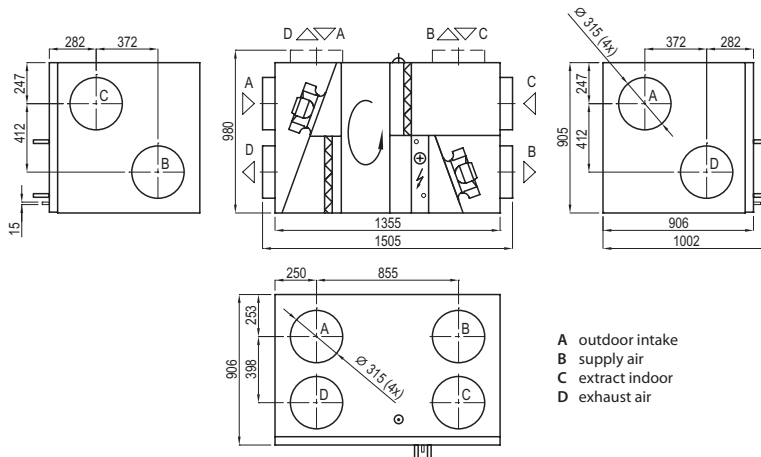

#### Shown as left (L1)

