


GREENDEC-25

FLEXIBLE SILENCER

Material: aluminum/polyester outerjacket with 25 mm sound insulation, the inside of the duct consists of polypropylene fabric, which protected with the antimicrobial Sanitized® hygienic function.

Operational temperature: -30 / +90 (inside), +140 (outside) °C.

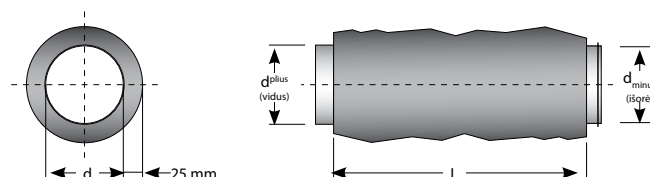

Dimensions, mm		Attenuation, when frequency F						
d	L	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
125	500	5,3	11,3	22,6	21,4	26,2	31,3	11,5
	1000	10,7	23,0	36,4	34,9	40,0	40,9	20,8
160	500	4,3	10,9	17,1	17,9	19,7	21,9	14,2
	1000	12,5	28,5	28,3	25,1	29,7	37,1	18,9
200	1000	19,1	36,1	30,0	28,5	32,5	33,2	13,9

d, mm	L = 500 mm		L = 1000 mm	
	Code	Weight kg/pcs.	Code	Weight kg/pcs.
125	1234429	0,73	1234446	0,97
160	1234449	0,96	1234451	1,28
200			1234456	1,61